


# ART. 6921SW sim. DIN 6921 sim. ISO 1665


Vite a testa esagonale con flangia zigrinata



## ART. 6921SW sim. DIN 6921 sim. ISO 1665









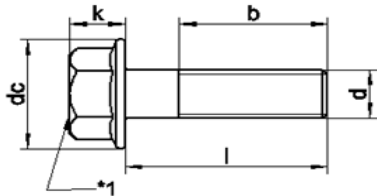








































Hexagon head bolt with flange and serration

Disponibile/Available

Aisi 304 / A2 

 Tot. Filetto/ Full thread



b	16	18	22	26	30	38
k max.	5,4	6,6	8,1	9,2	11,5	14,4
s	8	10	13	15	16	21
dc	11,8	14,2	18	22,3	26,6	35
e	8,71	10,95	14,26	16,5	17,62	23,15
[External-6k]	8	10	13	15	16	21
l / d	M5	M6	M8	M10	M12	M16
10						
12						
16						
20						
25						
30						
35						
40						
45						
50						
60						
70						